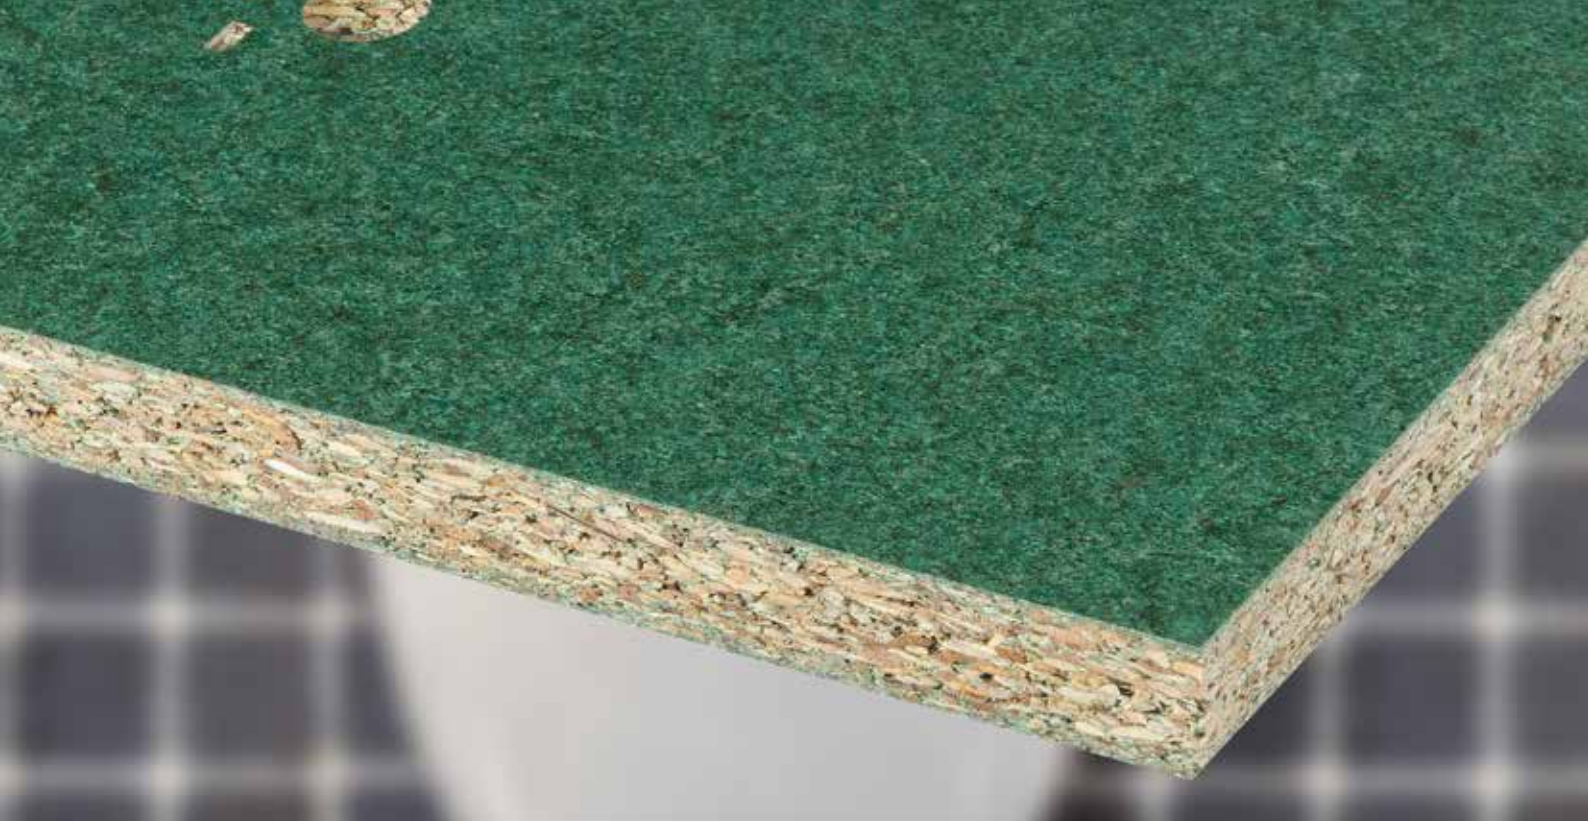


Sanipan®

Pre-drilled, structural construction board for use as a back wall for wall-mounted toilets

Sanipan is a type of moisture-repellent, structural and pre-drilled P5 chipboard, suitable as a back wall for wall-mounted toilets in dry-wall construction. The pre-drilled holes in the structural panels allow for fast and easy on-site installation. Sanipan can be used in humid environments (Service Class 2). Its finely sanded surface can easily be tiled. Sanipan is made from 100% circular wood: 85% recycled wood plus fresh wood from residual flows from the wood industry, sustainable forestry and roadside verge maintenance.

Applications

- Walls
- Dry-wall construction
- Service Class 2

Characteristics

- Chipboard P5
- Moisture resistant
- Pre-drilled
- Structural applications
- Surface can be tiled
- 100% circular wood



UNILIN

Sanipan®

Applications

Structural panels with pre-drilled holes for wall-mounted toilet pre-wall systems, suitable for zones where humidity is an issue (bathrooms, sanitary facilities).

Technical specifications

General specification + standard	Unit	Average values						
Thickness EN 324-1	mm	>6-13	>10-13	>13-20	>20-25	>25-32	>32-40	>40
Bending strength EN 310	N/mm^2	18	18	16	14	12	10	9
Flexual rigidity EN 310	N/mm^2	3,500	3,500	3,300	3,000	2,600	2,400	2,100
Internal adhesive strength EN 319	N/mm^2	0.45	0.45	0.45	0.40	0.35	0.30	0.25
Degree of swelling/24 hours EN 317	%	13	11	10	10	10	9	9

Sanipan satisfies the general requirements and falls under Formaldehyde Emission Category E1, as described in Table 1 of the EN 622-1 standard.

Finish

Sanipan is finished with a finely sanded surface, thus providing the ideal conditions for extra finishing.

Available dimensions and/or thicknesses

Sanipan is available from stock in a thickness of 18mm and dimensions of 1,200x1,230mm. For technical options concerning other thicknesses and dimensions as well as minimum purchase quantities, please get in touch with our sales team or send an e-mail to info.panels@unilin.com.

Certificates

UNILIN, division panels, is actively engaged in sustainable forestry. Sanipan has a low formaldehyde emission (Category E1) and can be provided with a PEFC and FSC label on request.

UNILIN, division panels
Ingelmunstersteenweg 229 – 8780 Oostrozebeke – Belgium
info.panels@unilin.com / www.unilinpanels.com

24.01.2020