
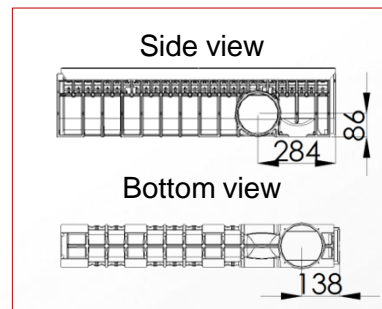
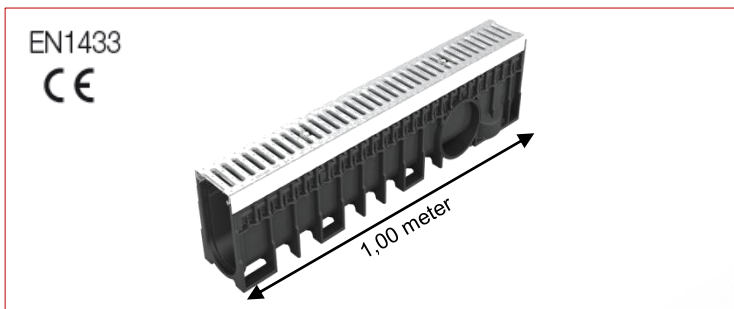


Kenadrain I Channel 100mm wide with galvanized steel slotted grating class A15 – Height 4

Code : DR104AP

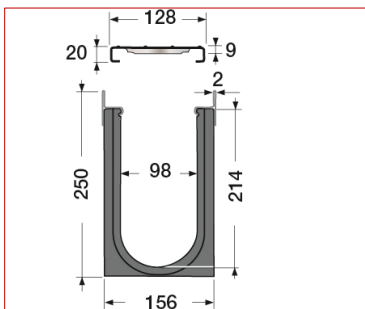


FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the **CE** marking, it can be used in private area for all building applications, the environment of home, parks and gardens in class A15.

DESCRIPTION :

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- one galvanized steel slotted grating class A15
- 2 screws per grating on galvanized locking bar

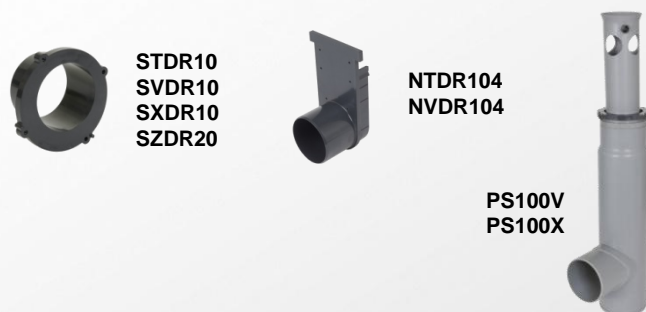


ACCESSORIES :

To connect the channels to the underground network :

- end cap/end outlet Ø100 or 110 – NTDR104 or NVDR104
- vertical or lateral outlet (using the ADPS100) Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- vertical or lateral outlet Ø160 – SZDR20
- sump unit (using the ADPS100) with outlet Ø110 or 125 – PS100V or PS100X
- adaptation part for PS100X, PS100V, STDR10, SVDR10 and SXDR10 – ADPS100


TECHNICAL DATA :

Resistance class: A15
 Effective width: 98 mm
 Effective depth: 214 mm
 Grating type: Galvanized steel slotted
 Drainage surface: 260 cm²/ml
 Hydraulic section: 200 cm²
 Opening dimensions: 10 / 80 mm
 Weight: 10.0 Kg



IMPLEMENTATION :

X = 50 mm; L = 230 mm
 Z = 50 mm; y = 255 mm

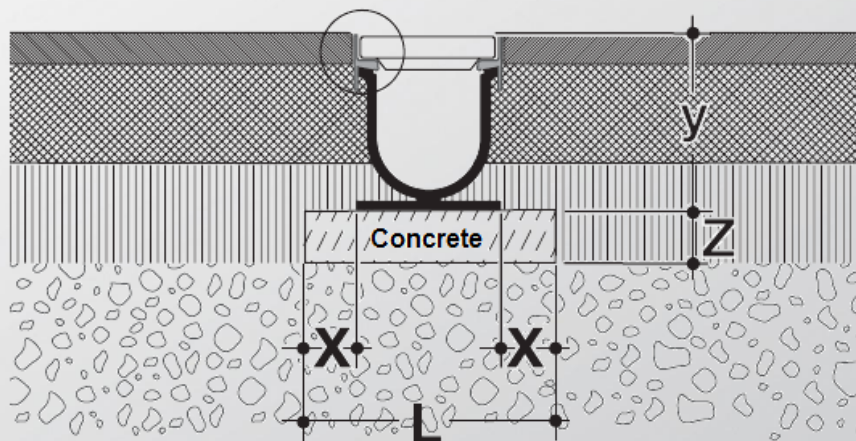

QUALITY - ENVIRONMENT :



DATE : August 2014