



DOCIA RANGE: Traps for tiled flooring
PVC trap with 10 x 10 grid, horizontal outlet










SICAX10IHNC - SICAX10IHC - SICAX10IH - SICAX10HNP

FUNCTION :

These traps are aimed at draining water from tiled floorings :

- They can be used on public or private facilities, especially in dwellings and hospitals, retirement homes, students homes, technical facilities, dressing-rooms, etc.
- they guarantee a perfect waterproofing, whatever the situation (under screed waterproofing, or under tile waterproofing).
- They adapt to any height of screed and tile.

Picture	Code Nr	Designation	Class	Membrane	Grid	Picture of grid
	SICAX10IHNC	Trap with grid and frame, 304 stainless steel	K3	Yes	Square Design	
	SICAX10IHC	Trap with grid and frame, 304 stainless steel	K3	No	Square Design	
	SICAX10IH	Trap with frame, 304 stainless steel	K3	No	No	At choice
	SICAX10HNP	Trap with grid and frame, White PVC	K3	Yes	White PVC	

DESCRIPTION :

These traps are composed of :

- A floor trap in PVC, heat resistant.
- A clamp ring for waterproofing membrane with screws in stainless steel.
- A cuttable extension tube with a frame and a 10 x 10 cm grid.
- A waterproofing membrane, 36cm x 36cm (according to the versions).
- Ø 50 horizontal outlet male, and Ø 40 female.
- Flow rate : 0.8 l/s.
- Water seal height : 50mm



Siège social : 37, rue Pierre & Marie Curie
BP 10966 - 49309 Cholet Cedex
Tel : 02 41 63 73 83
Fax : 02 41 63 73 57
Email:tech-com.nicoll@alifaxis.com




DOCIA RANGE : Traps for tiled flooring
PVC trap with 10 x 10 grid, horizontal outlet
SICAX10IHNC - SICAX10IHC - SICAX10IH - SICAX10HNP



ACCESSORIES :

- Designer grids in 304 stainless steel, 10 x 10 ; 2 mm thickness


GSICAX10IB




GSICAX10IA




GSICAX10IE



GSICAX10IL



GSICAX10IC




- Additional extension part (optional) : RALSIX



INSTALLATION:

- Prepare a Ø 250mm recess .
- Place and connect the soil pipe to the trap, with solvent welding.
- Make a slope (waterproofing under or above the screed).
- Depending on the screed or tile thickness, adjust the height of the extension tube (by cutting if needed), leaving the 12 mm necessary for the clipping (for particularly thick screeds, the additional extension part must be used).
- Clip the extension tube + frame + extension part on the trap.
- Put the tile and make the tile joints

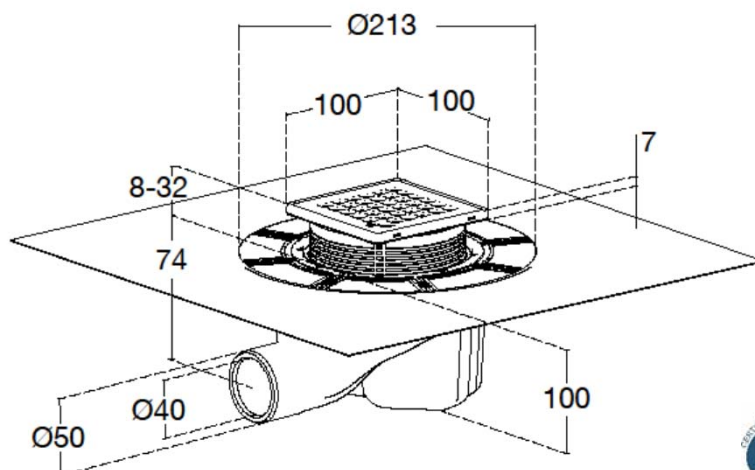

June 2017



Nicoll

Siège social : 37, rue Pierre & Marie Curie
BP 10966 - 49309 Cholet Cedex
Tel : 02 41 63 73 83
Fax : 02 41 63 73 57
Email: tech-com.nicoll@aliaxis.com

an Aliaxis company