

Section 1. PRODUCT DESCRIPTION

MECHANICAL ANCHOR – LE-ZN

Mechanical anchor LE-ZN consists of threaded rod bolt ended with expansion cone, expansion sleeve, hexagonal nut and washer. It is made of low carbon steel. Corrosion protection is ensured by galvanized zinc coating. Fixing is executed by tightening the nut with adequate torque which causes sliding of expansion sleeve over the expansion cone and creates a permanent anchorage. The anchor is ideal for fixing in indoor: machines and equipment, montage of light and medium weight steel structures, handrails and storage racks.



Recommended for substrates:

- non-cracked, reinforced and non-reinforced concrete of C20/25 ÷ C50/60 strength class

Advantages:

- fast and simple installation by driving the anchor and tightening
- ready to carry full capacity immediately
- supplied assembled with the nut and washer
- fire resistance R30 – R120




Mechanical anchor hold European Technical Assessment: ETA-20/0640

Section 2. METHOD OF INSTALLATION

1. Original mechanical anchors delivered by the manufacturer can be used only
2. Before installation check whether parameters of the substrate (where anchors are to be installed) conform to parameters of the substrate used in testing, based on which characteristic loading resistances of connections were determined (see table 1÷6)
3. Install anchors so that reinforcement of the substrate is not damaged
4. Before installation, indicate the drilling points where anchors are to be installed in accordance with installation guidelines
5. Then drill the holes in accordance with the parameters selected (diameter and depth of the hole), perpendicularly to the substrate (see table 1, 4)
6. Clean holes with SCF brush (min. 3x) and blow out clean with PCF pump (min. 3x)
7. Drive anchor into the hole by light hits of a hammer and then tighten the screw by applying an adequate torque (T_{inst}) using torque wrench (see table 1, 4)
8. Note that after the anchor is expanded, the washer under the nut should be pressed against the fixed member

Assembly diagram:

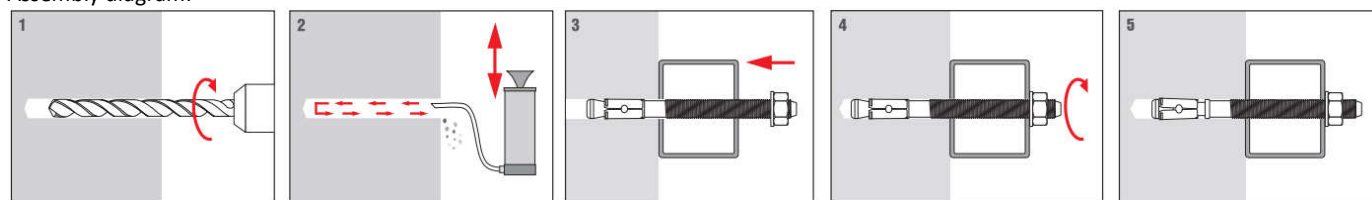

PRODUCT DATA SHEET – LE-ZN

Section 3. TECHNICAL DATA

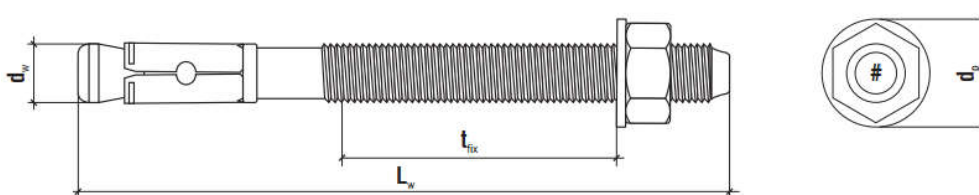


TABLE 1. INSTALLATION PARAMETERS – STANDARD EMBEDMENT DEPTH

| Anchor diameter | d | [mm] | Ø8 | Ø10 | Ø12 | Ø16 |
|--|--------------------|------|-----|-----|-----|-------|
| Drill hole diameter | d ₀ | [mm] | 8 | 10 | 12 | 16 |
| Effective embedment depth | h _{ef} | [mm] | 40 | 60 | 70 | 85 |
| Depth of drill hole | h ₀ ≥ | [mm] | 52 | 74 | 88 | 106 |
| Diameter of clearance hole in the fixture | d _f ≤ | [mm] | 10 | 12 | 14 | 18 |
| Torque moment | T _{inst} | [Nm] | 20 | 30 | 50 | 100 |
| Width torque wrench | SW | [mm] | 13 | 17 | 19 | 24 |
| Minimum thickness of concrete member | h _{min} | [mm] | 100 | 120 | 160 | 170 |
| Minimum allowable spacing | s _{min} | [mm] | 54 | 82 | 109 | 116 |
| Minimum allowable edge distance | c _{min} | [mm] | 54 | 82 | 109 | 116 |
| Spacing for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of concrete cone failure | s _{cr,N} | [mm] | 120 | 180 | 210 | 255 |
| Edge distance for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of concrete cone failure | c _{cr,N} | [mm] | 60 | 90 | 105 | 127,5 |
| Spacing for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of splitting failure | s _{cr,sp} | [mm] | 200 | 300 | 400 | 425 |
| Edge distance for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of splitting failure | c _{cr,sp} | [mm] | 100 | 150 | 200 | 215 |

TABLE 2. TENSION LOAD – STANDARD EMBEDMENT DEPTH

| | | | | | | |
|---|--------------------|------|------|------|------|------|
| Characteristic resistance of an anchor in case of steel failure | N _{Rk,s} | [kN] | 16,2 | 27,7 | 38,6 | 71,9 |
| Design resistance of an anchor in case of steel failure (γ=1,81) | N _{Rd,s} | [kN] | 8,9 | 15,3 | 21,3 | 39,7 |
| Characteristic resistance in case of failure by pull-out | N _{Rk,p} | [kN] | * | * | * | * |
| Design resistance in case of failure by pull-out | N _{Rd,p} | [kN] | * | * | * | * |
| Characteristic resistance of an anchor in case of concrete cone failure | N _{Rk,c} | [kN] | 12,4 | 22,9 | 28,8 | 38,6 |
| Design resistance of an anchor in case of concrete cone failure (γ=1,5) | N _{Rd,c} | [kN] | 8,3 | 15,2 | 19,2 | 25,7 |
| Characteristic resistance of a single anchor in case of splitting failure | N _{Rk,sp} | [kN] | 12,4 | 22,9 | 28,8 | 38,6 |
| Design resistance of a single anchor in case of splitting failure (γ=1,5) | N _{Rd,sp} | [kN] | 8,3 | 15,2 | 19,2 | 25,7 |

*pull-out failure is not authoritative

TABLE 3. SHEAR LOAD – STANDARD EMBEDMENT DEPTH

| | | | | | | |
|--|--------------------------------|------|------|------|-------|-------|
| Characteristic resistance of an anchor in case of steel failure | V _{Rk,s} | [kN] | 12,4 | 19,7 | 28,7 | 53,4 |
| Design resistance of an anchor in case of steel failure (γ=1,51) | V _{Rd,s} | [kN] | 8,2 | 13,1 | 19,0 | 35,4 |
| Characteristic bending resistance | M ⁰ _{Rk,s} | [Nm] | 38,0 | 75,4 | 131,6 | 316,0 |
| Design bending resistance (γ=1,51) | M ⁰ _{Rd,s} | [Nm] | 25,2 | 49,9 | 87,2 | 209,2 |
| Characteristic resistance of an anchor in case of concrete pry-out failure | V _{Rk,cp} | [kN] | 12,4 | 22,9 | 28,8 | 77,1 |
| Design resistance of an anchor in case of concrete pry-out failure (γ=1,5) | V _{Rd,cp} | [kN] | 8,3 | 15,2 | 19,2 | 51,4 |

PRODUCT DATA SHEET – LE-ZN

TABLE 4. INSTALLATION PARAMETERS – REDUCED EMBEDMENT DEPTH

| Anchor diameter | d | [mm] | Ø8 | Ø10 | Ø12 | Ø16 |
|--|--------------------|------|----|-----|-----|------|
| Drill hole diameter | d ₀ | [mm] | - | 10 | 12 | 16 |
| Effective embedment depth | h _{ef} | [mm] | - | 40 | 50 | 65 |
| Depth of drill hole | h ₀ ≥ | [mm] | - | 54 | 68 | 86 |
| Diameter of clearance hole in the fixture | d _f ≤ | [mm] | - | 12 | 14 | 18 |
| Torque moment | T _{inst} | [Nm] | - | 30 | 50 | 100 |
| Width torque wrench | SW | [mm] | - | 17 | 19 | 24 |
| Minimum thickness of concrete member | h _{min} | [mm] | - | 100 | 100 | 130 |
| Minimum allowable spacing | s _{min} | [mm] | - | 54 | 68 | 88 |
| Minimum allowable edge distance | c _{min} | [mm] | - | 54 | 68 | 88 |
| Spacing for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of concrete cone failure | s _{cr,N} | [mm] | - | 120 | 150 | 195 |
| Edge distance for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of concrete cone failure | c _{cr,N} | [mm] | - | 60 | 75 | 97,5 |
| Spacing for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of splitting failure | s _{cr,sp} | [mm] | - | 200 | 250 | 325 |
| Edge distance for ensuring the transmission of the characteristic resistance in tension of a single fastener without edge and spacing effects in case of splitting failure | c _{cr,sp} | [mm] | - | 100 | 125 | 165 |

TABLE 5. TENSION LOAD - REDUCED EMBEDMENT DEPTH

| | N _{Rk,s} | [kN] | - | 27,7 | 38,6 | 71,9 |
|---|--------------------|------|---|------|------|------|
| Characteristic resistance of an anchor in case of steel failure | N _{Rd,s} | [kN] | - | 15,3 | 21,3 | 39,7 |
| Design resistance of an anchor in case of steel failure (γ=1,81) | N _{Rk,p} | [kN] | - | * | * | * |
| Characteristic resistance in case of failure by pull-out | N _{Rd,p} | [kN] | - | * | * | * |
| Design resistance in case of failure by pull-out (γ=1,5) | N _{Rk,c} | [kN] | - | 12,4 | 17,4 | 25,8 |
| Characteristic resistance of an anchor in case of concrete cone failure | N _{Rd,c} | [kN] | - | 8,3 | 11,6 | 17,2 |
| Design resistance of an anchor in case of concrete cone failure (γ=1,5) | N _{Rk,sp} | [kN] | - | 12,4 | 17,4 | 25,8 |
| Characteristic resistance of a single anchor in case of splitting failure | N _{Rd,sp} | [kN] | - | 8,3 | 11,6 | 17,2 |
| Design resistance of a single anchor in case of splitting failure | | | | | | |

*pull-out failure is not authoritative

TABLE 6. SHEAR LOAD – REDUCED EMBEDMENT DEPTH

| | V _{Rk,s} | [kN] | - | 19,7 | 28,7 | 53,4 |
|--|--------------------------------|------|---|------|-------|-------|
| Characteristic resistance of an anchor in case of steel failure | V _{Rd,s} | [kN] | - | 13,1 | 19,0 | 35,4 |
| Design resistance of an anchor in case of steel failure (γ=1,51) | M ⁰ _{Rk,s} | [Nm] | - | 75,4 | 131,6 | 316,0 |
| Characteristic bending resistance | M ⁰ _{Rd,s} | [Nm] | - | 49,9 | 87,2 | 209,2 |
| Design bending resistance (γ=1,51) | V _{Rk,cp} | [kN] | - | 12,4 | 17,4 | 51,6 |
| Characteristic resistance of an anchor in case of concrete pry-out failure | V _{Rd,cp} | [kN] | - | 8,3 | 11,6 | 34,4 |
| Design resistance of an anchor in case of concrete pry-out failure (γ=1,5) | | | | | | |

PRODUCT DATA SHEET – LE-ZN

| TABLE 7. CHARACTERISTIC VALUES OF RESISTANCE TO TENSION LOAD UNDER FIRE EXPOSURE | | | | | | |
|--|---------------|------|---|-----|-----|-----|
| Anchor diameter | d | [mm] | Ø8 | Ø10 | Ø12 | Ø16 |
| Min. effective anchorage depth | h_{ef} | [mm] | 40 | 40 | 50 | 65 |
| Characteristic fire resistance duration at 30 minutes | | | | | | |
| Steel failure | $N_{Rk,s,fi}$ | [kN] | 0,4 | 0,9 | 1,7 | 3,1 |
| Pull-Out Failure | $N_{Rk,p,fi}$ | [kN] | 3,0 | 3,3 | 4,5 | 7,0 |
| Concrete Cone Failure | $N_{Rk,c,fi}$ | [kN] | 2,6 | 2,6 | 4,5 | 8,6 |
| Characteristic fire resistance duration at 60 minutes | | | | | | |
| Steel failure | $N_{Rk,s,fi}$ | [kN] | 0,3 | 0,8 | 1,3 | 2,4 |
| Pull-Out Failure | $N_{Rk,p,fi}$ | [kN] | 3,0 | 3,3 | 4,5 | 7,0 |
| Concrete Cone Failure | $N_{Rk,c,fi}$ | [kN] | 2,6 | 2,6 | 4,5 | 8,6 |
| Characteristic fire resistance duration at 90 minutes | | | | | | |
| Steel failure | $N_{Rk,s,fi}$ | [kN] | 0,3 | 0,6 | 1,1 | 2,0 |
| Pull-Out Failure | $N_{Rk,p,fi}$ | [kN] | 3,0 | 3,3 | 4,5 | 7,0 |
| Concrete Cone Failure | $N_{Rk,c,fi}$ | [kN] | 2,6 | 2,6 | 4,5 | 8,6 |
| Characteristic fire resistance duration at 120 minutes | | | | | | |
| Steel failure | $N_{Rk,s,fi}$ | [kN] | 0,2 | 0,5 | 0,8 | 1,6 |
| Pull-Out Failure | $N_{Rk,p,fi}$ | [kN] | 2,4 | 2,6 | 3,6 | 5,6 |
| Concrete Cone Failure | $N_{Rk,c,fi}$ | [kN] | 2,0 | 2,0 | 3,6 | 6,9 |
| Spacing | | | | | | |
| Spacing | $S_{cr,N}$ | [mm] | 4 x h_{ef} | | | |
| | S_{min} | [mm] | 54 | 54 | 68 | 88 |
| Edge distance | $C_{cr,N}$ | [mm] | 2 x h_{ef} | | | |
| | C_{min} | [mm] | 2 x h_{ef} , however if the fire attack is from more than one side, the edge distance of the anchor has to be ≥ 300 mm and ≥ 2 x h_{ef} | | | |

$\gamma_{M,fi}$ - partial safety factor for resistance under fire exposure (usually $\gamma_{M,fi} = 1,0$)

| TABLE 8. CHARACTERISTIC VALUES OF RESISTANCE TO SHEAR LOAD UNDER FIRE EXPOSURE | | | | | | |
|--|---------------|------|-----|-----|-----|-----|
| Anchor diameter | d | [mm] | Ø8 | Ø10 | Ø12 | Ø16 |
| Characteristic fire resistance duration at 30 minutes | | | | | | |
| Steel failure without lever arm | $V_{Rk,s,fi}$ | [kN] | 0,4 | 0,9 | 1,7 | 3,1 |
| Steel failure with lever arm | $M_{Rk,s,fi}$ | [Nm] | 0,4 | 1,7 | 3,9 | 9,3 |
| Characteristic fire resistance duration at 60 minutes | | | | | | |
| Steel failure without lever arm | $V_{Rk,s,fi}$ | [kN] | 0,3 | 0,8 | 1,3 | 2,4 |
| Steel failure with lever arm | $M_{Rk,s,fi}$ | [Nm] | 0,3 | 1,4 | 2,9 | 7,0 |
| Characteristic fire resistance duration at 90 minutes | | | | | | |
| Steel failure without lever arm | $V_{Rk,s,fi}$ | [kN] | 0,3 | 0,6 | 1,1 | 2,0 |
| Steel failure with lever arm | $M_{Rk,s,fi}$ | [Nm] | 0,3 | 1,1 | 2,5 | 6,0 |
| Characteristic fire resistance duration at 120 minutes | | | | | | |
| Steel failure without lever arm | $V_{Rk,s,fi}$ | [kN] | 0,2 | 0,5 | 0,8 | 1,6 |
| Steel failure with lever arm | $M_{Rk,s,fi}$ | [Nm] | 0,2 | 0,9 | 1,9 | 4,6 |

PRODUCT DATA SHEET – LE-ZN

| TABLE 9. SELECTION TABLE | | | | | |
|--------------------------|--------------------------------------|--|--------|---------------|-----------------|
| Product code | Anchor diameter and length | Max. thickness of fixed member | Thread | Nut head type | Pieces per pack |
| | d _w x L _w [mm] | t _{fix1} / t _{fix2} [mm] | [-] | [-] | [pcs.] |
| LE-ZN M8 | | | | | |
| LE-ZN-08060 | 8x60 | 5 / - | M8 | SW-13 | 100 |
| LE-ZN-08075 | 8x75 | 20 / - | M8 | SW-13 | 100 |
| LE-ZN-08095 | 8x95 | 40 / - | M8 | SW-13 | 50 |
| LE-ZN-08115 | 8x115 | 60 / - | M8 | SW-13 | 50 |
| LE-ZN-08135 | 8x135 | 80 / - | M8 | SW-13 | 50 |
| LE-ZN-08155 | 8x155 | 100 / - | M8 | SW-13 | 50 |
| LE-ZN M10 | | | | | |
| LE-ZN-10085 | 10x85 | 5 / 25 | M10 | SW-17 | 50 |
| LE-ZN-10095 | 10x95 | 15 / 35 | M10 | SW-17 | 50 |
| LE-ZN-10105 | 10x105 | 25 / 45 | M10 | SW-17 | 25 |
| LE-ZN-10115 | 10x115 | 35 / 55 | M10 | SW-17 | 25 |
| LE-ZN-10135 | 10x135 | 55 / 75 | M10 | SW-17 | 25 |
| LE-ZN-10155 | 10x155 | 75 / 95 | M10 | SW-17 | 25 |
| LE-ZN M12 | | | | | |
| LE-ZN-12085 | 12x85 | 5 / - | M12 | SW-19 | 50 |
| LE-ZN-12095 | 12x95 | 15 / - | M12 | SW-19 | 50 |
| LE-ZN-12105 | 12x105 | 5 / 25 | M12 | SW-19 | 50 |
| LE-ZN-12115 | 12x115 | 15 / 35 | M12 | SW-19 | 50 |
| LE-ZN-12125 | 12x125 | 25 / 45 | M12 | SW-19 | 25 |
| LE-ZN-12145 | 12x145 | 45 / 65 | M12 | SW-19 | 25 |
| LE-ZN-12165 | 12x165 | 65 / 85 | M12 | SW-19 | 25 |
| LE-ZN M16 | | | | | |
| LE-ZN-16105 | 16x105 | 5 / - | M16 | SW-24 | 25 |
| LE-ZN-16115 | 16x115 | 15 / - | M16 | SW-24 | 25 |
| LE-ZN-16125 | 16x125 | 5 / 25 | M16 | SW-24 | 25 |
| LE-ZN-16145 | 16x145 | 25 / 45 | M16 | SW-24 | 25 |
| LE-ZN-16165 | 16x165 | 45 / 65 | M16 | SW-24 | 20 |

Section 4. REMARKS

1. All previous versions of this Product Data Sheet shall cease to be valid
2. Data given in this Product Data Sheet is in accordance with current knowledge and published in good faith. KLIMAS Sp. z o.o. is not responsible for correctness and quality of the fixing if recommendations regarding method of use and installation are not followed.