




CONTROL SHEET INSIDER SCAFFOLDING

Reference: 26402 4x0



Control date:	Site:	Marking date: 1
Inspector name:	Address:	

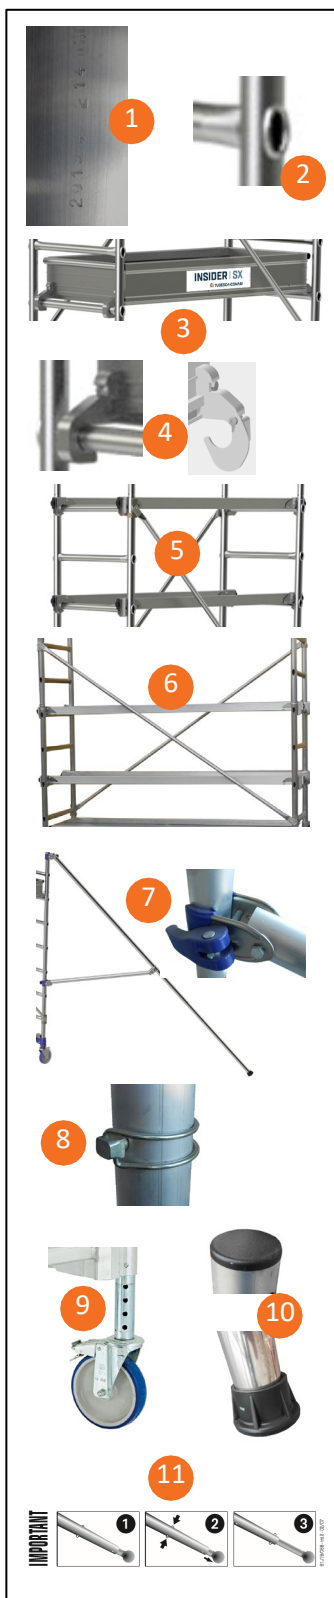

Perform a visual inspection before each use Carry out a formal control every 6 months in the check sheet Before the inspection, isolate and secure the product	CONFORMITY	
	YES	NO
General inspection of the product: Perform a visual inspection of the overall state of the product		
Check there are no damaged profiles and/or components (impacts, perforation, ...)	☐	☐
Check that all fittings (screws, rivets) are correctly tightened or in place	☐	☐
Visually inspect crimping (ladder-rung assembly) and that the rungs do not turn 2	☐	☐
Check that the scaffolding does not become dislocated 3	☐	☐
Check that the platform, toeboards and spars are present, correctly fitted and in good condition 4	☐	☐
Check that the platform hooks are present, correctly fitted and operate as intended 5	☐	☐
Check that the locking systems, rails and middle rails are present, correctly fitted and operate as intended 6	☐	☐
Check that the diagonals are present, correctly fitted and correctly locked 7	☐	☐
Check that the stabilisers are present, correctly fitted and operate as intended 8	☐	☐
Check that the ladder locking systems are present and in good condition 9	☐	☐
Check that the transport wheels are present, correctly fitted and in good condition and that the brakes function correctly 10	☐	☐
Check that bases and footpads are present and in good condition 11	☐	☐
Check that the labels and instructions are present	☐	☐
Product conclusions: suitable ☐ to be repaired ☐ to be retired ☐		
For spare parts, see the after-sales sheet available online in the "Documentation Centre" tab (After-sales split views category): https://www.tubescacomabi.com/fr/centre-de-documentation		
Date of next check:		

** Repairs must be performed by a qualified person. The product must be checked after repair.

